



***Outback 26***

---

# ASSEMBLY MANUAL





## **Outback 26**

---

1) Carefully open the carton remove the foam packaging material, then remove the bike and accessories.





## **Outback 26**

---

2) Attach Front tire assembly to the front fork, adjust the front fork and front wheel, install the nuts, then use the wrench to tight the nuts, (Noted the direction of the tire tread).







## **Outback 26**

---

3) Front fender assembly: install the front fender on front forks. Position the fender to the Tire, tighten the screws as shown below.

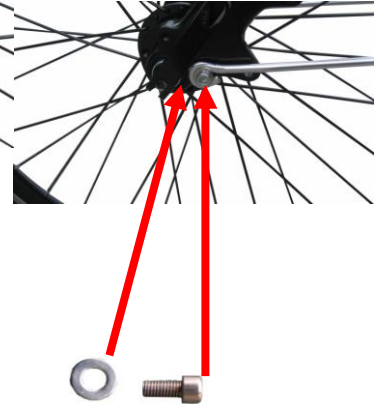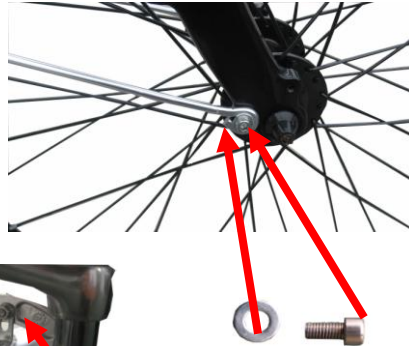



## ***Outback 26***

---

4) Handle Bar assembly: insert the stem into the front fork as shown below, adjust the height of the stem, adjust the direction to make handle bars are aligned parallel with front tire.






## ***Outback 26***

---

5) Seat post assembly: release the “quick release assembly”, insert seat post into the frame, adjust to desired height, then tighten the “quick release assembly”.






## ***Outback 26***

---

6) Pedal assembly: insert and tighten the right and left pedal onto the cranks arm.(note the rotation and the left and right pedals which are Marked with “L” and “R”).

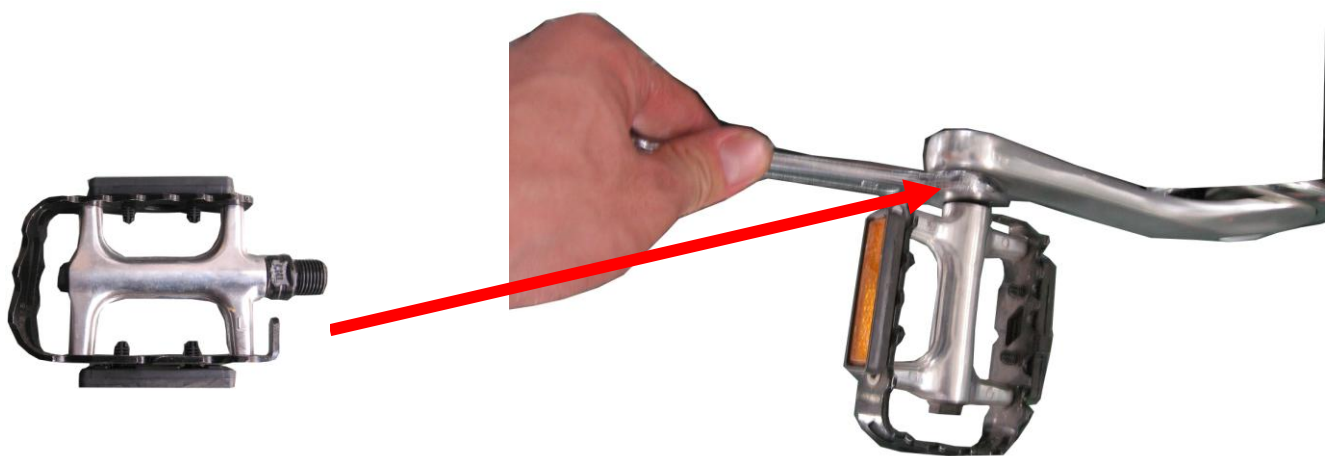



## ***Outback 26***

---

7) Front V-brake: Insert brake cable sleeve into the slot as shown, note the front wheel should rotate freely and the brake pads should not be touching the rim. To adjust loosen nut and pull cable to desired position.







## ***Outback 26***

---

8) Recheck assembly to ensure all nuts are properly tightened before use.

